


DZMx Plus Interconnect Drawings

Sheet 1 - DZMx Plus

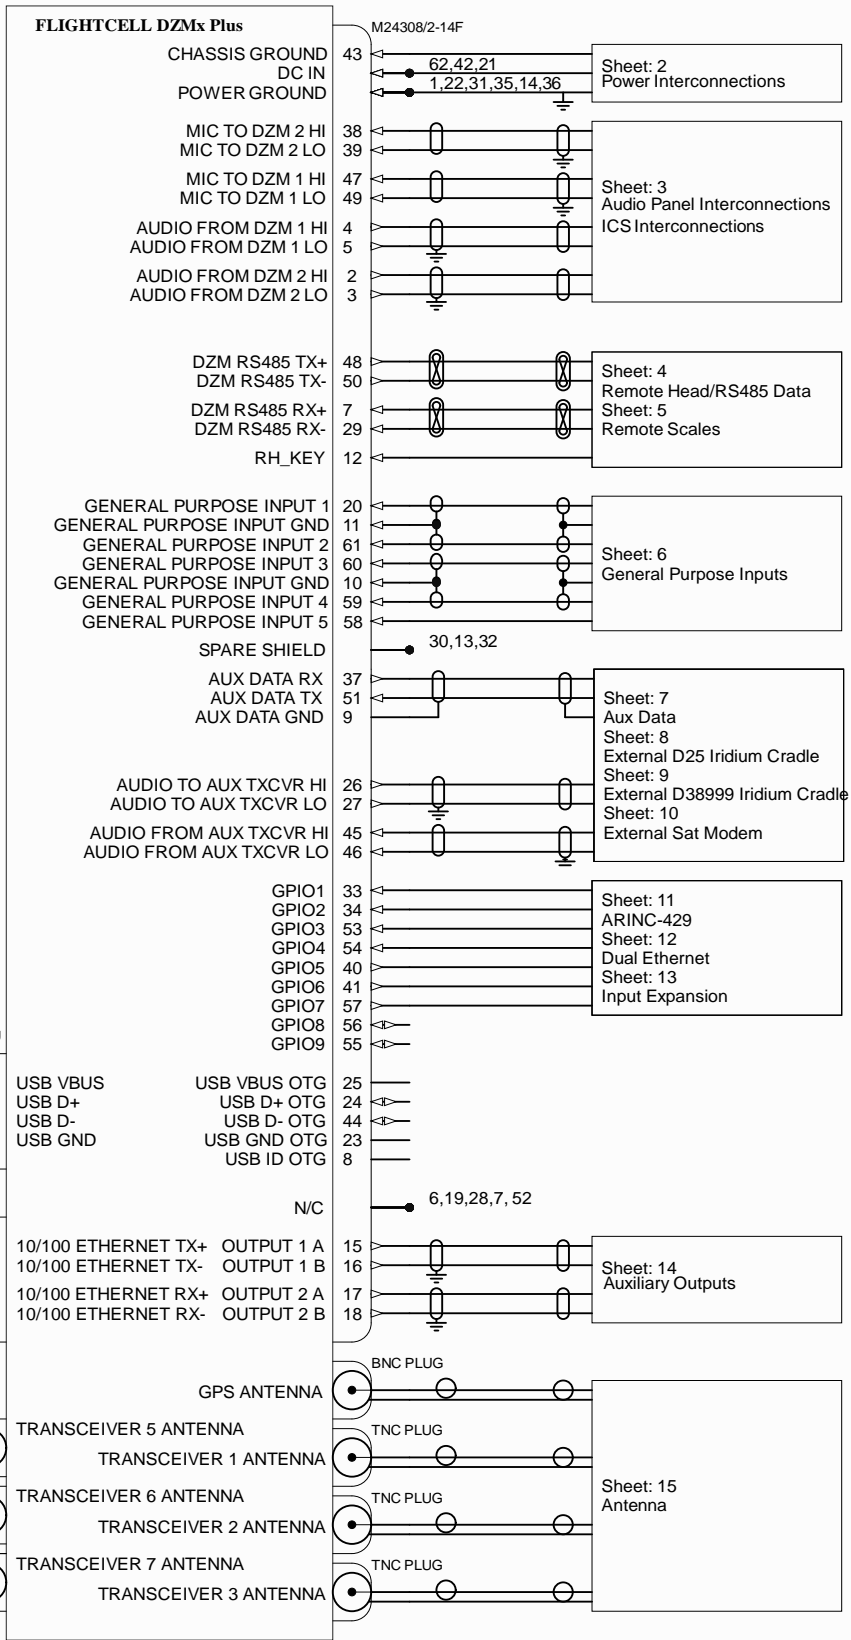


Sheet: 17
Pin Out Main Connector

Sheet: 16
WiFi Router

Sheet: 15
Antenna

NOTES:
 1. ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M2759/34-22-9
 OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/24SB2T14.
 2. UNIT GROUND IS INTERNALLY CONNECTED TO UNIT CHASSIS
 3. SYMBOL DESIGNATIONS

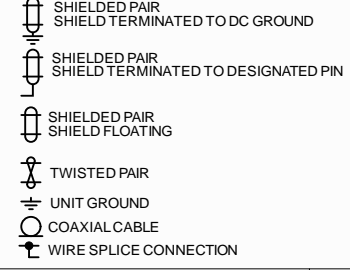

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		



Flightcell International Limited
 PO Box 1481, Nelson, New Zealand
 Ph:+64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus	
Sheet:	DZMx Plus ICD	1 of 17
Issue:	1.1	
Drawn By:	James Glasgow	
Filename:	Top_Level_SchDoc	
Date:	5/10/2020	Drawing No: WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial Version DZMx Plus Interconnect Drawings	13/02/20


DZMx Plus Interconnect Drawings

Sheet 2 - Power Interconnections

NOTES:


In order to minimise ground loops, it is recommended that the ground connections from the DZM, external satphone or cell modem (if fitted) are run separately to a single grounding point, ideally the same point as used by the ICS.

It is recommended that DC power be taken from the emergency (primary) power bus, particularly if engine stop/start events need to be captured.

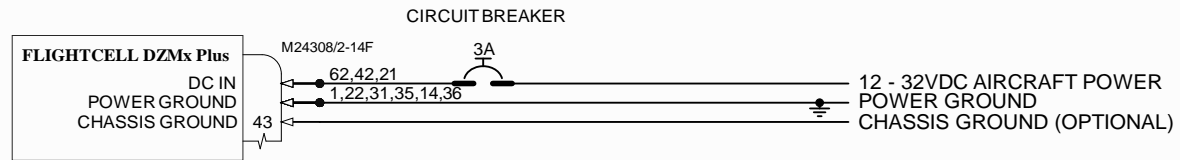

NOTES:

1. POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
2. SYMBOL DESIGNATIONS



APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

Flightcell
ALWAYS CONNECTED


Flightcell International Limited
PO Box 1481, Nelson, New Zealand
Ph: +64 3 545 8652 www.flightcell.com

Product: Flightcell DZMx Plus
Sheet: Power Interconnections 2 of 17
Issue: 1.1

1.1	Reference to Civilian Removed	23/09/20	Drawn By: James Glasgow
1.0	Initial version	13/02/20	Filename: Power Interconnections.SchDoc
REV	DESCRIPTION	DATE	Date: 5/10/2020 Drawing No: WRL_DZ7_001

DZMx Plus Drawings

Sheet 3 - Audio Panel Interconnections

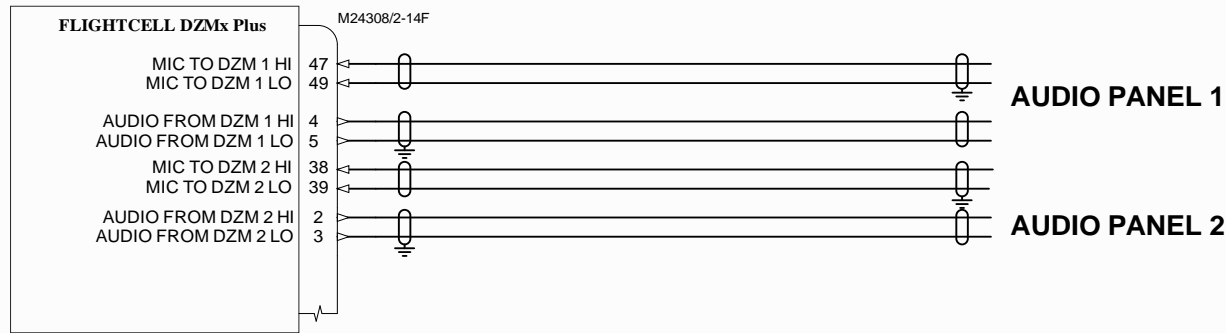

NOTES:

- ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
- IT IS RECOMMENDED THAT THE POWER GROUND CONNECTIONS BE RUN SEPARATELY TO A SINGLE EARTHING POINT, SO AS TO MINIMISE GROUND LOOPS
- SYMBOL DESIGNATIONS

SHIELDED PAIR
SHIELD TERMINATED TO DC GROUND

SHIELDED PAIR
SHIELD FLOATING

UNIT GROUND

Notes on connection to Aircraft Audio System:

The preferred method of connection is where the Aircraft Audio System provides a Cellphone port or similar. In this case the audio input should be configured as unbiased.

Alternatively, connection may be made to an unused radio port. For some systems it may be necessary to use the biased voltage on the DZM input (if the system expects mic bias from the radio); otherwise the input should be configured as unbiased.

The DZM may otherwise be connected to a headset port - in this case the input bias voltage should be enabled.

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

Flightcell
ALWAYS CONNECTED


Flightcell International Limited
PO Box 1481, Nelson, New Zealand
Ph:+64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus
Sheet:	Audio Panel Interconnections 3 of 17
Issue:	1.1
Drawn By:	James Glasgow
Filename:	ICS Interconnections.SchDoc
Date:	5/10/2020
Drawing No:	WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

DZMx Plus Interconnect Drawings

Sheet 4: Remote Head/RS485 Interconnections

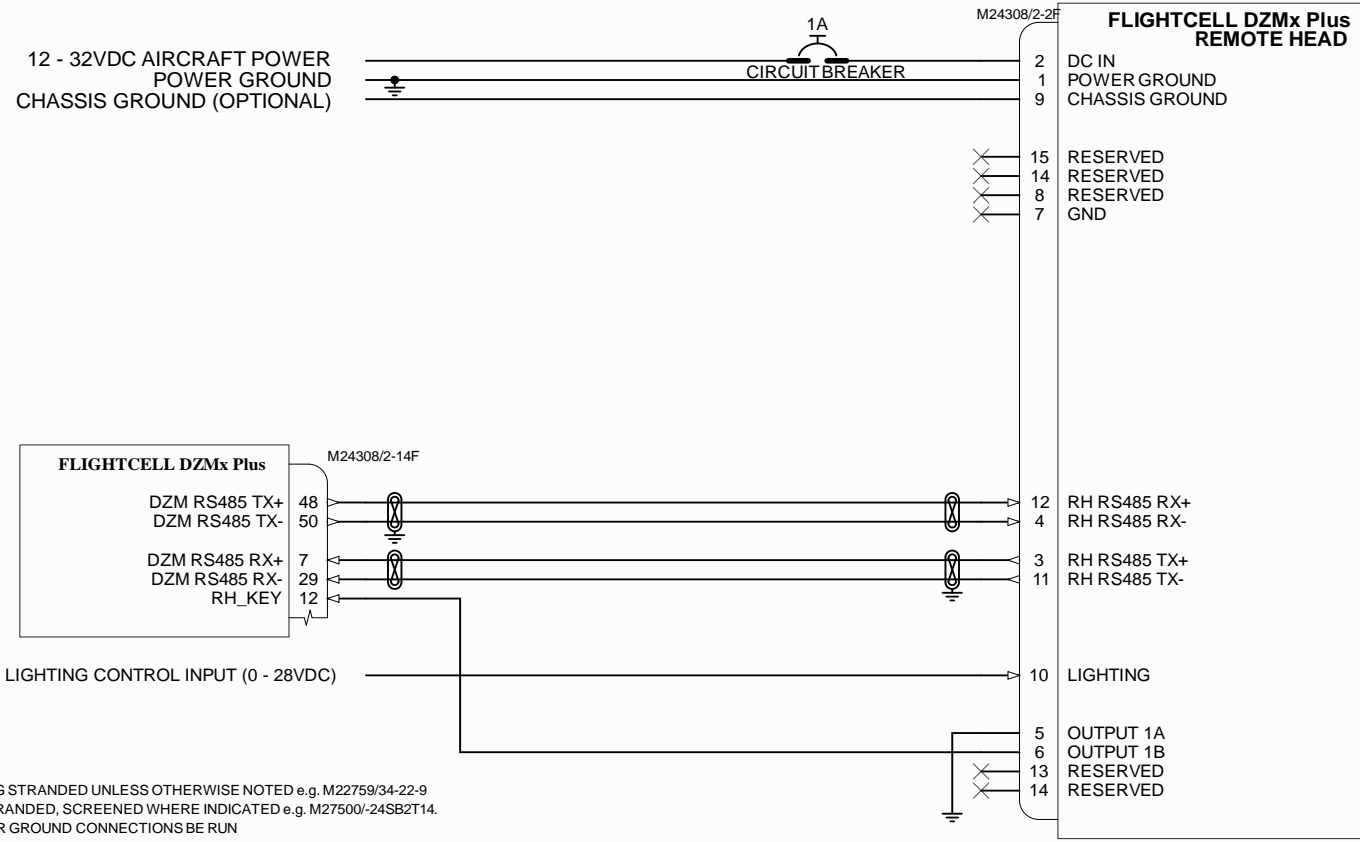


NOTE:

The Remote Head requires only the connections shown in this drawing.

The secondary lighting input need be fitted only if the display backlight brightness needs to be controlled externally. Otherwise the brightness can be set to a fixed level via the menus.

This drawing shows the DZMx Plus connected to a Flightcell Remote Head. The RS485 can also be used for other applications, contact Flightcell for details.

- NOTES:**
- ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
 OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
 - IT IS RECOMMENDED THAT THE POWER GROUND CONNECTIONS BE RUN SEPARATELY TO A SINGLE EARTHING POINT, SO AS TO MINIMISE GROUND LOOPS
 - SYMBOL DESIGNATIONS



APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		



Flightcell International Limited
 PO Box 1481, Nelson, New Zealand
 Ph: +64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus	
Sheet:	Remote Head/RS485	4 of 17
Issue:	1.1	
Drawn By:	James Glasgow	
Filename:	Remote Head Interconnections.SchDoc	
Date:	5/10/2020	Drawing No: WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

1

2

3

4

1


2

3

4

DZMx Plus Interconnect Drawings

Sheet 5: Remote Scales Interconnections

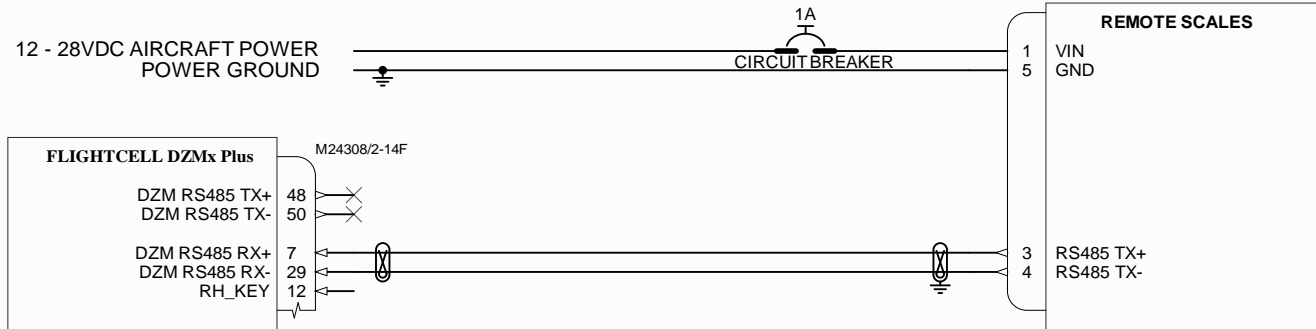

NOTES:

1. ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
2. IT IS RECOMMENDED THAT THE POWER GROUND CONNECTIONS BE RUN SEPARATELY TO A SINGLE EARTHING POINT, SO AS TO MINIMISE GROUND LOOPS
3. SYMBOL DESIGNATIONS

SHIELDED PAIR
SHIELD TERMINATED TO DC GROUND

SHIELDED PAIR
SHIELD FLOATING

TWISTED PAIR

UNIT GROUND

WIRE SPLICE CONNECTION

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

Flightcell
ALWAYS CONNECTED

Flightcell International Limited
PO Box 1481, Nelson, New Zealand
Ph: +64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus
Sheet:	Remote Scales 5 of 17
Issue:	1.1
Drawn By:	James Glasgow
Filename:	Remote_Scales_Interconnections.SchDoc
Date:	5/10/2020 Drawing No: WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

DZMx Plus Interconnect Drawings

Sheet 6 - General Purpose Inputs

Inputs:


The inputs are all configurable as either variable or switched with adjustable thresholds.

The inputs nominal operating range is 0-28VDC, but they will tolerate an input range of -32 to +32VDC.

If these inputs are used, they need to be enabled on the DZM.

The inputs can be used for other purposes depending on the firmware configuration; contact Flightcell for advice on any specific applications.

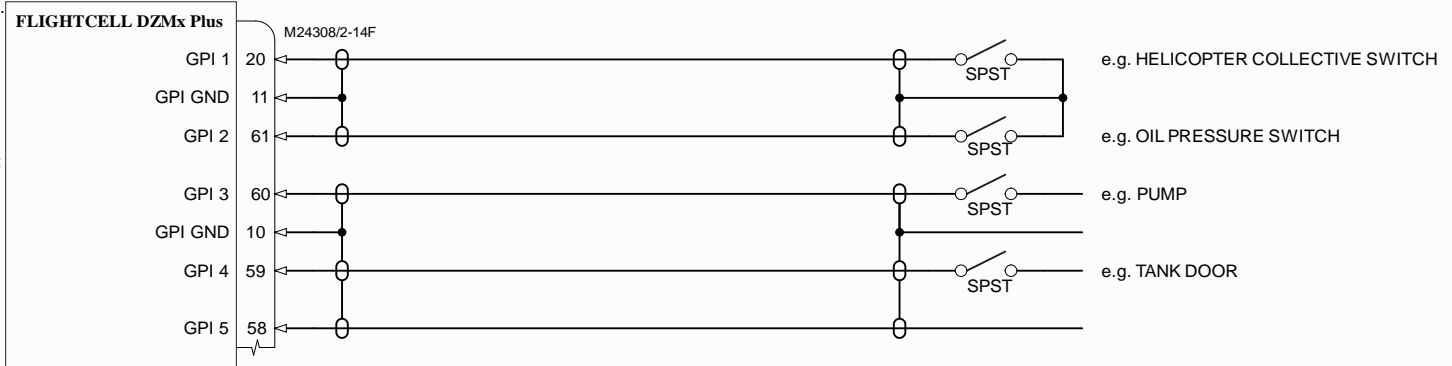


All inputs are referenced to a common ground which is connected internally to the DZMx Plus to Chassis ground. Therefore the aircraft chassis ground can be used for the input return signal if required.



NOTES:

- ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.

2. SYMBOL DESIGNATIONS

-  SHIELDED SINGLE CONDUCTOR
-  SHIELD TERMINATED TO DESIGNATED PIN
-  WIRE SPLICE CONNECTION

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		



Flightcell International Limited
 PO Box 1481, Nelson, New Zealand
 Ph:+64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus
Sheet:	General Purpose Inputs 6 of 17
Issue:	1.1
Drawn By:	James Glasgow
Filename:	General Purpose Inputs.SchDoc
Date:	5/10/2020
Drawing No:	WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

1

2

3

4

1


2

3

4

DZMx Plus Interconnect Drawings

Sheet 7 - Aux Data Interconnections

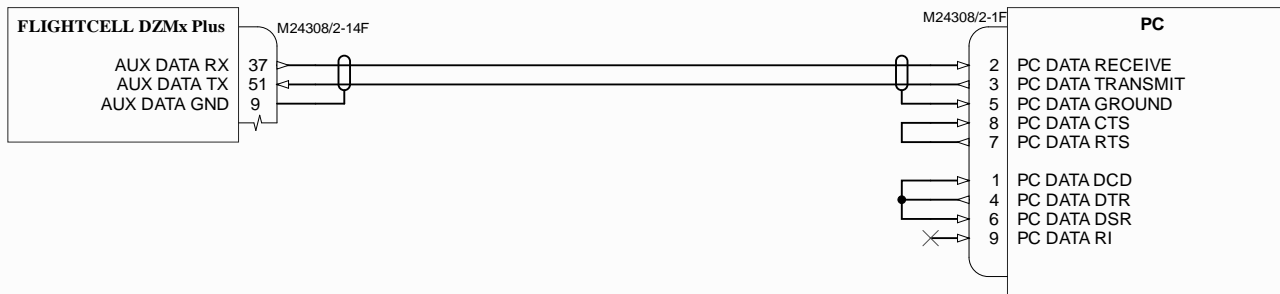

Note: the diagnostic port can be fitted for in-situ maintenance purposes. If fitted it is highly advisable to locate this connector such that it is readily accessible.

It is recommended that when connecting to a PC the loopback connections on RTS, CTS, DCD, DTR and DSR are made as shown.

This port can also be used to connect to an external Transceiver.

NOTES:

1. ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
2. SYMBOL DESIGNATIONS

- SHIELDED PAIR
SHIELD TERMINATED TO DESIGNATED PIN
- SHIELDED PAIR
SHIELD FLOATING
- WIRE SPLICE CONNECTION

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

Flightcell[®]
ALWAYS CONNECTED


Flightcell International Limited
PO Box 1481, Nelson, New Zealand
Ph: +64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus
Sheet:	Aux Data Interconnections 7 of 17
Issue:	1.1
Drawn By:	James Glasgow
Filename:	Aux Data Interconnections.SchDoc
Date:	5/10/2020
Drawing No:	WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

DZMx Plus Interconnect Drawings

Sheet 8 - Optional External DB25 Iridium Cradle (9505/A/9555/9575)

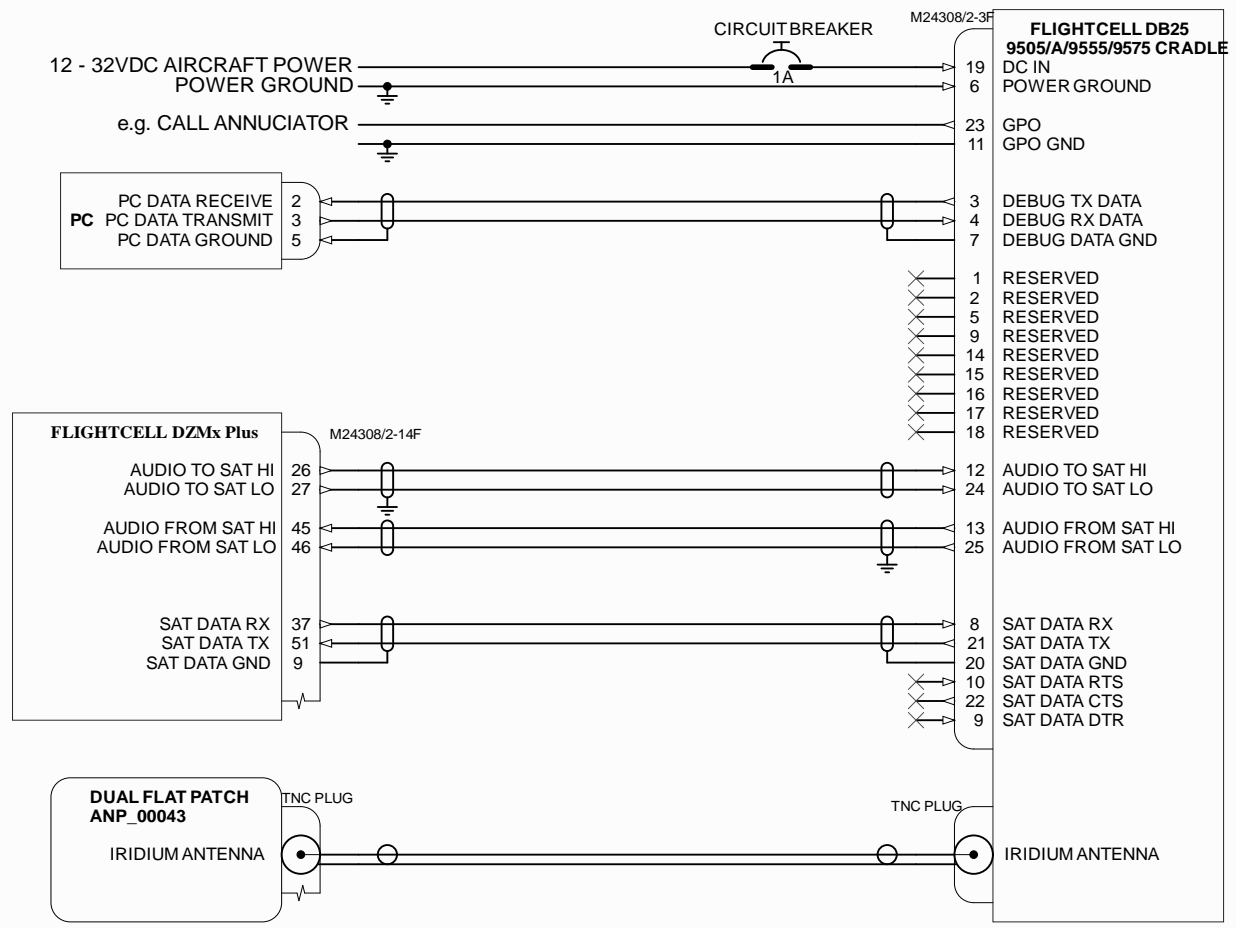

NOTES:

The cradle GPO can be used to switch external loads, e.g. annunciator panel indicator.

The output is capable of switching a 100mA load. The max applied voltage must not exceed 32VDC.

The output can be configured via the DZM Manager PC software.

The Debug port is not required for normal use, it can be used for firmware upgrades if required.

NOTES:

- ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
- IT IS RECOMMENDED THAT THE POWER GROUND CONNECTIONS BE RUN SEPARATELY TO A SINGLE EARTHING POINT, SO AS TO MINIMISE GROUND LOOPS
- SYMBOL DESIGNATIONS

- SHIELDED PAIR
SHIELD TERMINATED TO DC GROUND
- SHIELDED PAIR
SHIELD TERMINATED TO DESIGNATED PIN
- SHIELDED PAIR
SHIELD FLOATING
- UNIT GROUND
- COAXIAL CABLE
- WIRE SPLICE CONNECTION
- CIRCUIT BREAKER

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

ALWAYS CONNECTED

Flightcell International Limited
PO Box 1481, Nelson, New Zealand
Ph: +64 3 545 8652 www.flightcell.com

Product: Flightcell DZMx Plus
Sheet: External DB25 Iridium Cradle 8 of 17
Issue: 1.1

Drawn By: James Glasgow
Filename: Aux DB25 Iridium Cradle.SchDoc
Date: 5/10/2020 Drawing No: WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

1


2

3

4

DZMx Plus Interconnect Drawings

Sheet 9 - Optional External D38999 Iridium Cradle (9505/A)

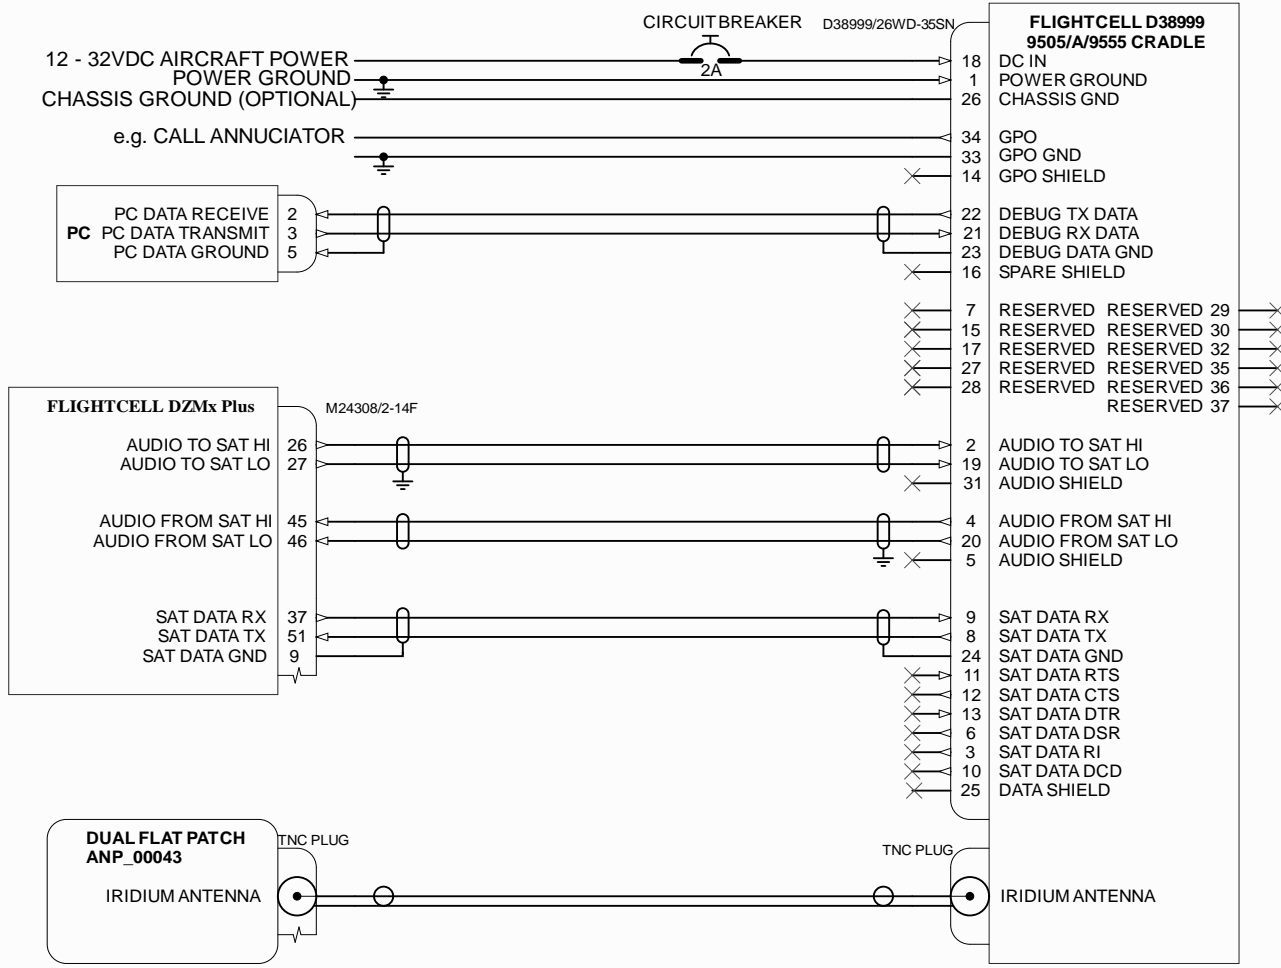

NOTES:

The GPO can be used to switch external loads, e.g. annunciator panel indicator.

The output is capable of switching a 100mA load. The max applied voltage must not exceed 32VDC.

The output can be configured via the DZM Manager PC software.

The Debug port is not required for normal use, it can be used for firmware upgrades if required.

The additional shield connections may be used to terminate shields rather than using the common power ground point if desired.

NOTES:

- ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9 OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
- IT IS RECOMMENDED THAT THE POWER GROUND CONNECTIONS BE RUN SEPARATELY TO A SINGLE EARTHING POINT, SO AS TO MINIMISE GROUND LOOPS
- SYMBOL DESIGNATIONS

SHIELDED PAIR SHIELD TERMINATED TO DC GROUND

SHIELDED PAIR SHIELD TERMINATED TO DESIGNATED PIN

SHIELDED PAIR SHIELD FLOATING

UNIT GROUND

COAXIAL CABLE

WIRE SPLICE CONNECTION

CIRCUIT BREAKER

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		



Flightcell International Limited
 PO Box 1481, Nelson, New Zealand
 Ph: +64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus
Sheet:	External D38999 Iridium Cradle9 of 17
Issue:	1.1
Drawn By:	James Glasgow
Filename:	Aux D38999 Iridium Cradle.SchDoc
Date:	5/10/2020
Drawing No:	WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

1

2

3

4

1

2

3

4

DZMx Plus Interconnect Drawings

Sheet 10 - Optional External Iridium Module Interconnections


NOTES:
 The Iridium/GPS antenna should be placed horizontally on the upper surface of the airframe such that it has an unobstructed view of the sky. The cell antenna should be placed on the underside of the aircraft; orientation is less critical.

Selection of coax cable depends on the lengths of the cable runs. See the Installation and Configuration manual for cable recommendations.

Where practicable the antenna should be placed well clear (at least 500mm and preferably 1000mm) from any other antenna operating at similar frequencies.


The antenna shown is a Dual Iridium + GPS antenna, for use in installations with internal SAT/CELL and the external Sat modem.

Single port Iridium antennas are available, contact Flightcell for details.

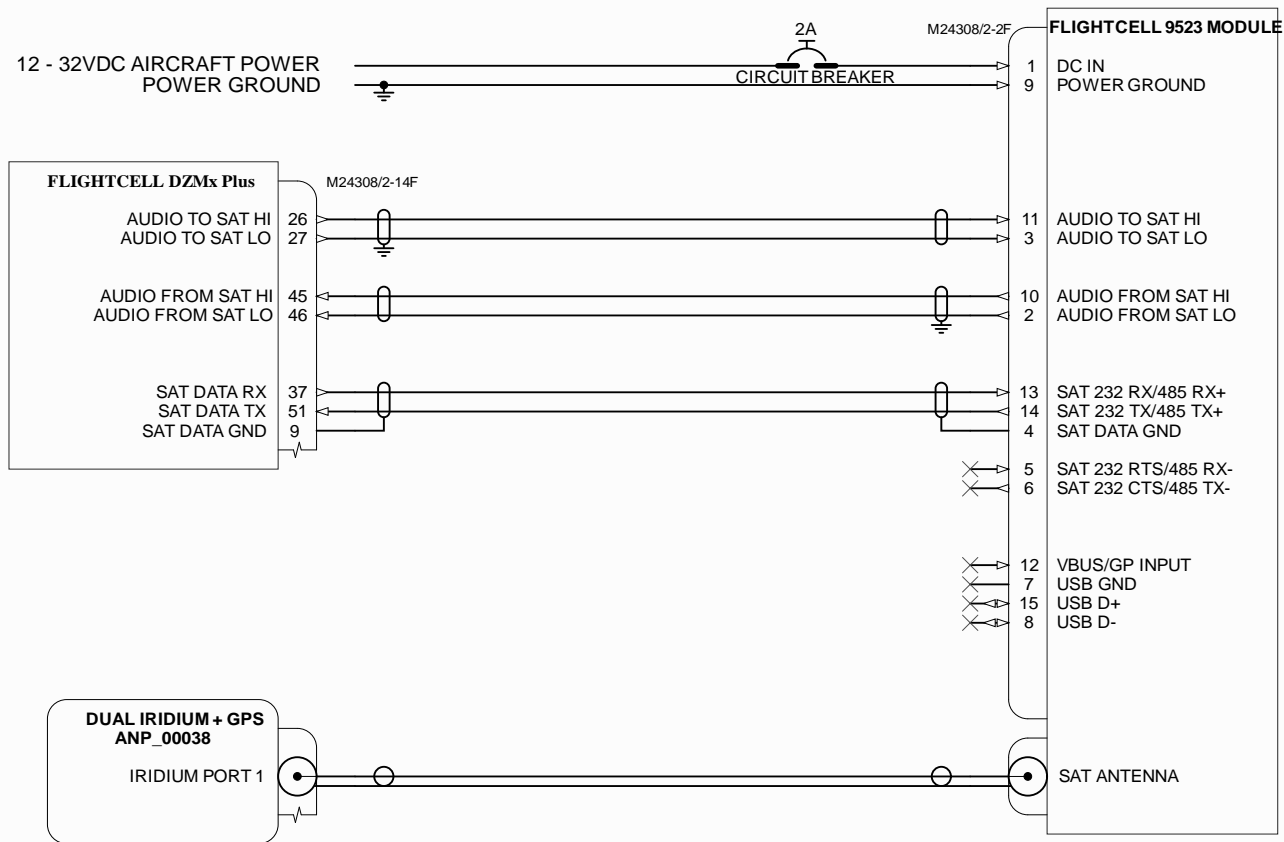

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

- NOTES:**
- ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
 OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
 - IT IS RECOMMENDED THAT THE POWER GROUND CONNECTIONS BE RUN SEPARATELY TO A SINGLE EARTHING POINT, SO AS TO MINIMISE GROUND LOOPS
 - SYMBOL DESIGNATIONS



REV	DESCRIPTION	DATE	Date:	Drawing No:
1.1	Reference to Civilian Removed	23/09/20	5/10/2020	WRL_DZ7_001
1.0	Initial version	13/02/20		

Flightcell
 ALWAYS CONNECTED

Flightcell International Limited
 PO Box 1481, Nelson, New Zealand
 Ph: +64 3 545 8652 www.flightcell.com

Product: Flightcell DZMx Plus
 Sheet: External Iridium Module 10 of 17
 Issue: 1.1


Drawn By: James Glasgow
 Filename: Aux Sat Modem Interconnections.SchDoc

DZMx Plus Interconnect Drawings

Sheet 11 - ARINC-429 Data Interconnections

NOTES:

ARINC-429 functionality is only available if the ARINC-429 card is installed in the DZMx Plus.

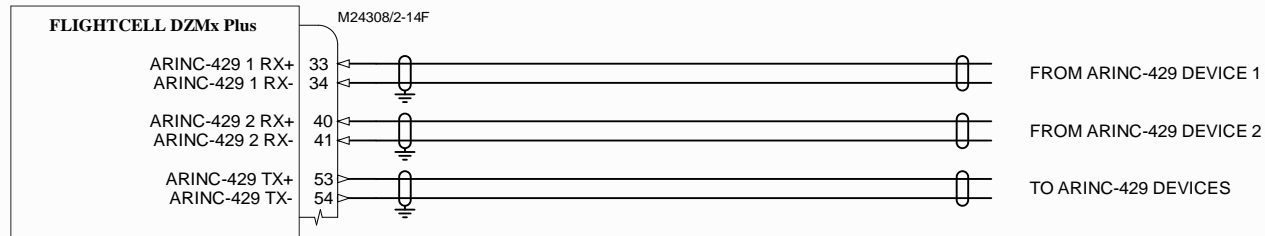

NOTES:

- ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.

2. SYMBOL DESIGNATIONS

- SHIELDED PAIR
SHIELD TERMINATED TO DC GROUND
- SHIELDED PAIR
SHIELD FLOATING
- UNIT GROUND
- WIRE SPLICE CONNECTION

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

Flightcell
ALWAYS CONNECTED


Flightcell International Limited
PO Box 1481, Nelson, New Zealand
Ph: +64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus
Sheet:	ARINC-429 Interconnections 11 of 17
Issue:	1.1
Drawn By:	James Glasgow
Filename:	ARINC-429 Interconnections.SchDoc
Date:	5/10/2020
Drawing No:	WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

DZMx Plus Interconnect Drawings

Sheet 12 - Dual Ethernet Interconnections

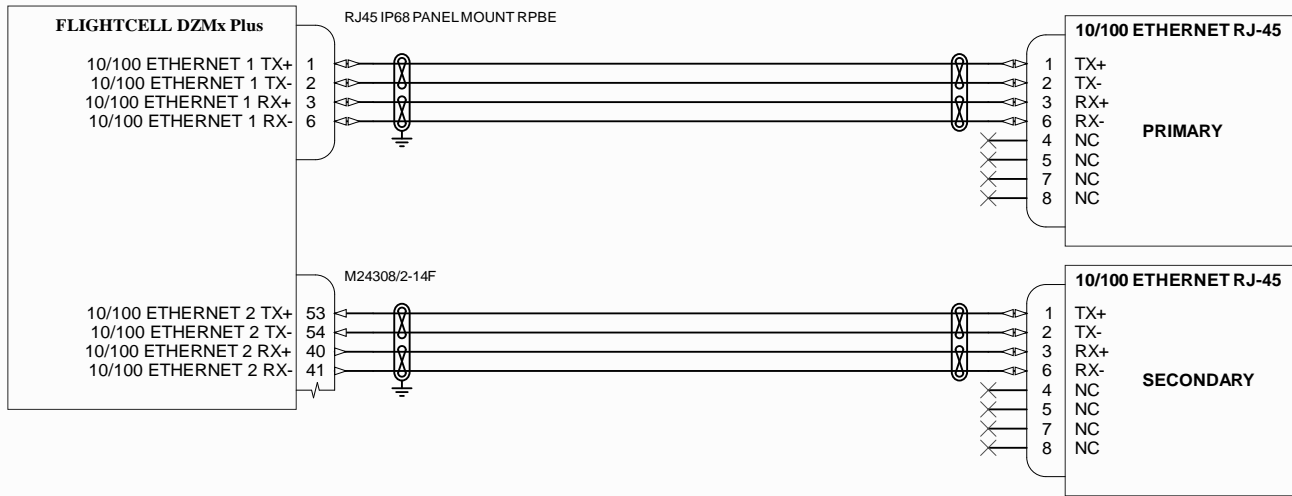

NOTES:
 The second Ethernet port is only available if the secondary ethernet card is installed in the DZMx Plus.

- NOTES:**
 1. ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
 OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
 2. ETHERNET CABLE SHOULD BE TWISTED PAIR CAT-5E OR COMPATIBLE e.g. PIC E10424.
 3. SYMBOL DESIGNATIONS

- SHIELDED PAIR
SHIELD TERMINATED TO DC GROUND
- SHIELDED PAIR
SHIELD FLOATING
- TWISTED PAIR
- UNIT GROUND
- WIRE SPLICE CONNECTION

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

Flightcell
 ALWAYS CONNECTED

Flightcell International Limited
 PO Box 1481, Nelson, New Zealand
 Ph: +64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus
Sheet:	Dual Ethernet Interconnections 12 of 17
Issue:	1.1
Drawn By:	James Glasgow
Filename:	Dual Ethernet_SchDoc
Date:	5/10/2020
Drawing No:	WRL_DZ7_001


REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

DZMx Plus Interconnect Drawings

Sheet 13 - Input Expansion Interconnections

NOTES:

Extra inputs are only available if the input expansion card is installed in the DZMx Plus.

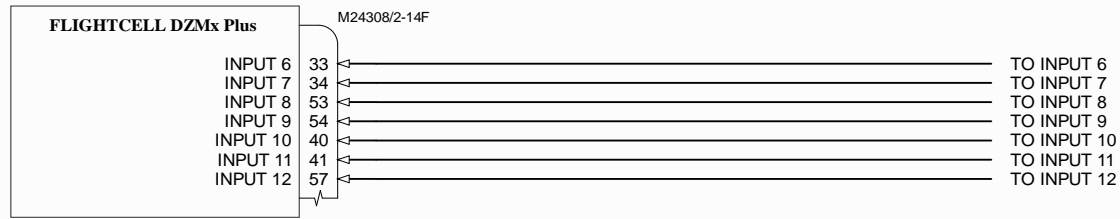

NOTES:

- ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
- SYMBOL DESIGNATIONS

- SHIELDED PAIR
SHIELD TERMINATED TO DC GROUND
- SHIELDED PAIR
SHIELD FLOATING
- UNIT GROUND
- WIRE SPLICE CONNECTION

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

Flightcell
ALWAYS CONNECTED

Flightcell International Limited
PO Box 1481, Nelson, New Zealand
Ph:+64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus
Sheet:	Input Expansion Connections 13 of 17
Issue:	1.1
Drawn By:	James Glasgow
Filename:	Input Expansion Interconnections.SchDoc
Date:	5/10/2020
Drawing No:	WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

DZMx Plus Interconnect Drawings

Sheet 14: Auxiliary Outputs

NOTES:


The auxiliary outputs can be used to switch external loads, e.g. annunciator panel indicator.

Each output is capable of switching a 500mA load. The voltage applied to either terminal must not exceed 60VDC.

Each output provides 1500Vrms isolation between the output terminals and the DZM internal circuitry.

When the output is on Terminal A is connected to Terminal B.

The outputs can be configured for a variety of purposes e.g. a call annunciator.

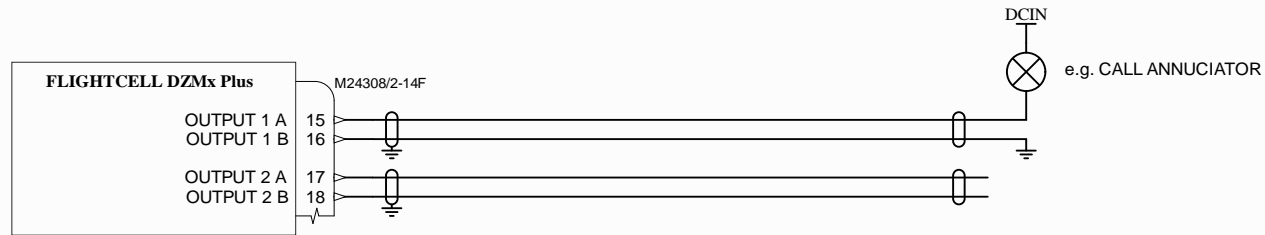

NOTES:

1. ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
2. SYMBOL DESIGNATIONS

SHIELDED PAIR
SHIELD TERMINATED TO DESIGNATED PIN

UNIT GROUND

WIRE SPLICE CONNECTION

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

Flightcell[®]
ALWAYS CONNECTED


Flightcell International Limited
PO Box 1481, Nelson, New Zealand
Ph: +64 3 545 8652 www.flightcell.com

Product: Flightcell DZMx Plus
Sheet: Auxiliary Outputs 14 of 17
Issue: 1.1

1.1	Reference to Civilian Removed	23/09/20	Drawn By: James Glasgow
1.0	Initial version	13/02/20	Filename: Auxiliary Outputs.SchDoc
REV	DESCRIPTION	DATE	Date: 5/10/2020 Drawing No: WRL_DZ7_001

DZMx Plus Interconnect Drawings

Sheet 15 - Antennas

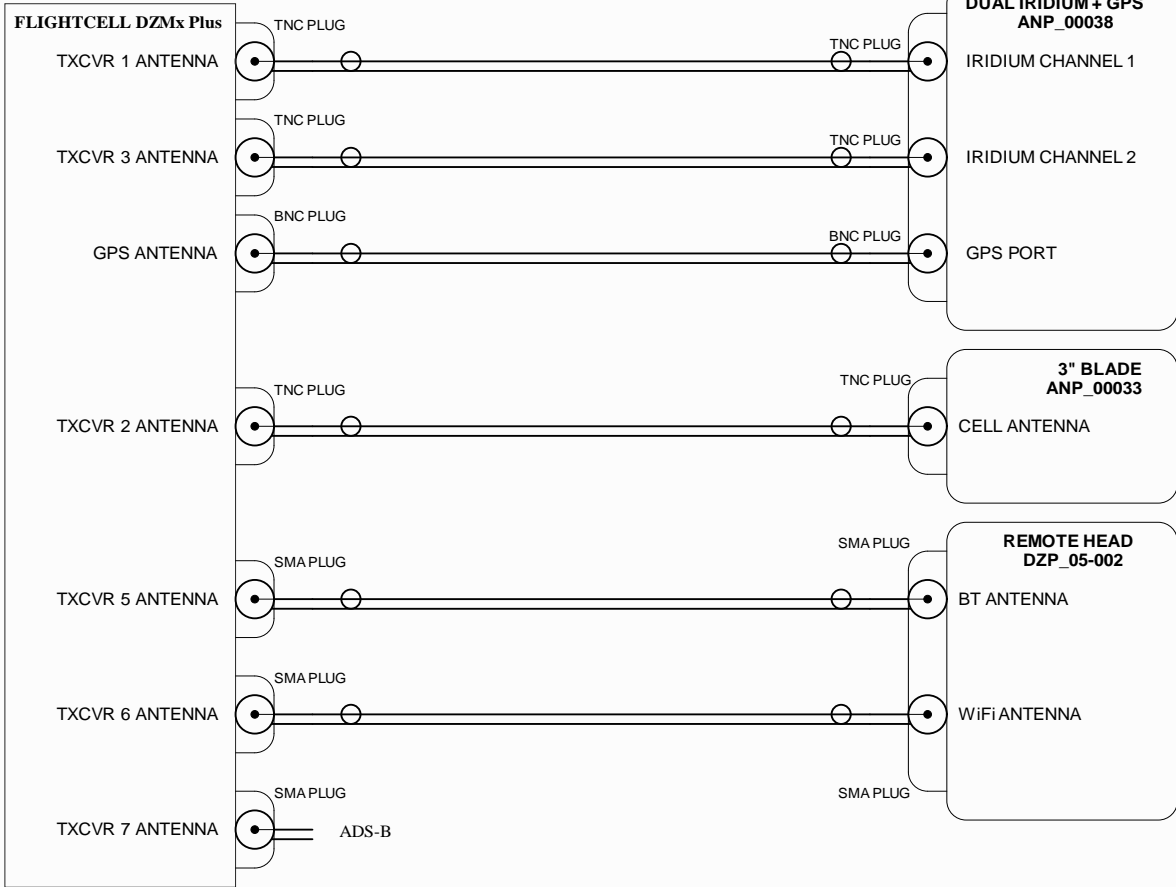

NOTES:
 The Iridium/GPS antenna should be placed horizontally on the upper surface of the airframe such that it has an unobstructed view of the sky. The cell antenna should be placed on the underside of the aircraft; orientation is less critical.

Selection of coax cable depends on the lengths of the cable runs. See the Installation and Configuration manual for cable recommendations.

Where practicable the antenna should be placed well clear (at least 500mm and preferably 1000mm) from any other antenna operating at similar frequencies.

The setup shown is an installation with two Iridium transceivers and one Cellular transceiver.

The third transceiver is optional, standard DZMx's only have two transceivers.

For standard installations with one Iridium transceiver and one cellular transceiver, a standard Iridium + GPS antenna is available (p/n ANP_00043).

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

- NOTES:**
- ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
 OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
 - SYMBOL DESIGNATIONS

☉ COAXIAL CABLE



Flightcell International Limited
 PO Box 1481, Nelson, New Zealand
 Ph: +64 3 545 8652 www.flightcell.com

Product: Flightcell DZMx Plus
 Sheet: Antennas 15 of 17
 Issue: 1.1

REV	DESCRIPTION	DATE	Date:	Drawing No:
1.1	Reference to Civilian Removed	23/09/20	5/10/2020	WRL_DZ7_001
1.0	Initial version	13/02/20		

Drawn By: James Glasgow
 Filename: Antenna.SchDoc

1

2

3

4

1


2

3

4

DZMx Plus Interconnect Drawings

Sheet 16 - WiFi Router Interconnections

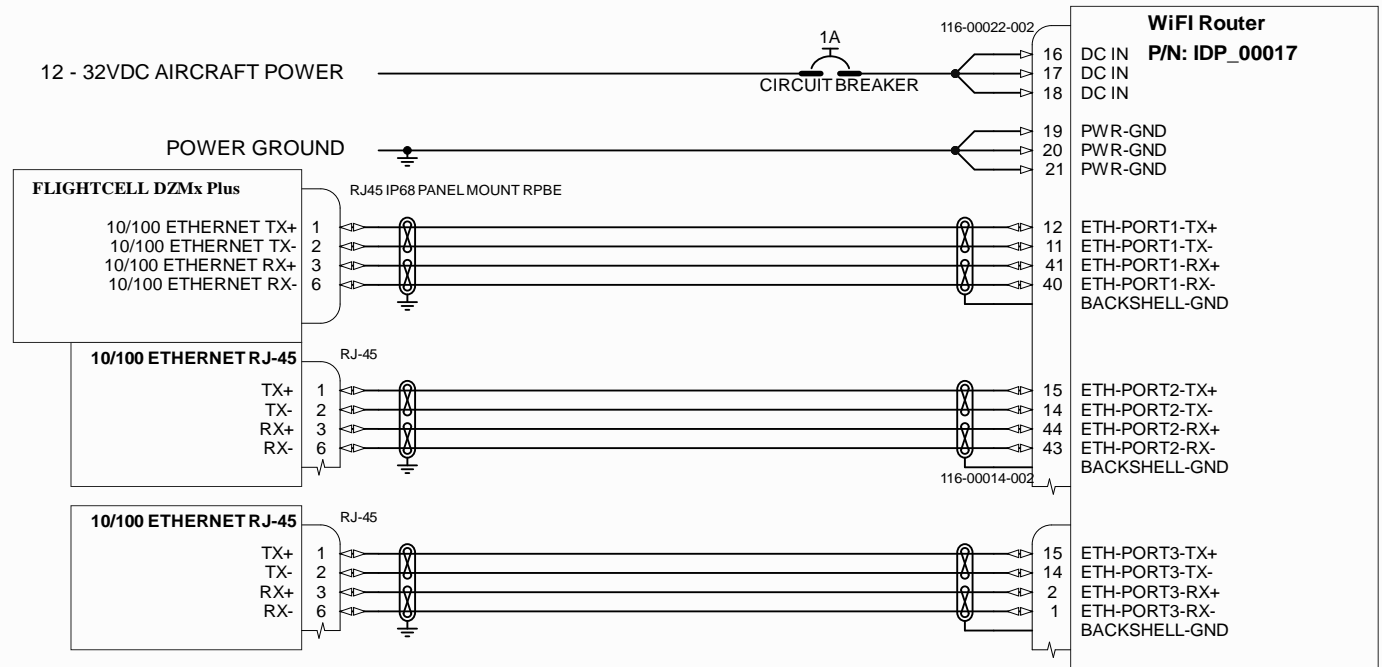

- NOTES:**
- ALL POWER CABLES SHOULD BE 22AWG STRANDED UNLESS OTHERWISE NOTED e.g. M22759/34-22-9
OTHER CABLES SHOULD BE 22AWG STRANDED, SCREENED WHERE INDICATED e.g. M27500/-24SB2T14.
 - USB CABLE SHOULD BE TWISTED PAIR COMPATIBLE WITH THE USB 2.0 SPECIFICATION e.g. PIC USB2422.
 - ETHERNET CABLE SHOULD BE TWISTED PAIR CAT-5E OR COMPATIBLE e.g. PIC E10424.
 - SYMBOL DESIGNATIONS

- SHIELDED PAIR
SHIELD TERMINATED TO DC GROUND
- SHIELDED PAIR
SHIELD FLOATING
- TWISTED PAIR
- UNIT GROUND
- WIRE SPLICE CONNECTION

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		




Flightcell International Limited
 PO Box 1481, Nelson, New Zealand
 Ph: +64 3 545 8652 www.flightcell.com

Product:	Flightcell DZMx Plus
Sheet:	WiFi Router Interconnections 16 of 17
Issue:	1.1
Drawn By:	James Glasgow
Filename:	WiFi Router.SchDoc
Date:	5/10/2020
Drawing No:	WRL_DZ7_001

REV	DESCRIPTION	DATE
1.1	Reference to Civilian Removed	23/09/20
1.0	Initial version	13/02/20

DZMx Plus Main Connector Pin out - Rear View HD SUB 62 F Connector

Sheet 17 - DZMx Plus

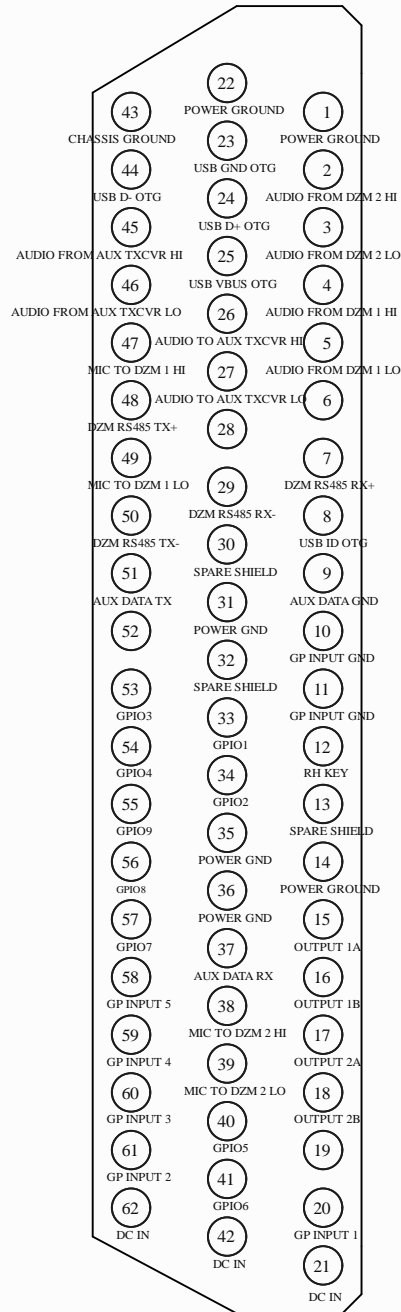

APPROVALS		DATE
DESIGN	RB	13/02/20
CHK'D		
APP'D		

Flightcell
ALWAYS CONNECTED

Flightcell International Limited
PO Box 1481, Nelson, New Zealand
Ph: +64 3 545 8652 www.flightcell.com

1.1	Reference to Civilian Removed	23/09/20	Product: Flightcell DZMx Plus
1.0	Initial version. Rear view main Connector pin out	13/02/20	Sheet: Main Connector Pin Out 17 of 17
REV	DESCRIPTION	DATE	Issue: 1.1
			Drawn By: Richard Benfield
			Filename: Pin Out Main Connector.SchDoc
			Date: 5/10/2020 Drawing No: WRL_DZ7_001